

Complete list of Meccano Parts
 Komplete lijst van Meccano-onderdelen
 Liste complète des pièces Meccano
 Distinta delle componenti del Corredo Meccano
 Vollständige Liste der Meccano-Teile
 Fullständig förteckning över Meccanodelar
 Lista completa de piezas de Meccano
 Lista completa de peças do Meccano
 Komplet list over Meccanodeler

5 PERFORATED STRIPS
 1 - 12½"; 32 cm
 1a - 9½"; 24 cm
 1b - 7½"; 19 cm
 2 - 5½"; 14 cm
 2a - 4½"; 11½ cm
 3 - 3½"; 9 cm
 4 - 3"; 7½ cm
 5 - 2½"; 6 cm
 6 - 2"; 5 cm
 6a 1½"; 38 mm

9c ANGLE GIRDERS
 7 - 24½"; 62 cm
 7a - 18½"; 47 cm
 8 - 12½"; 32 cm
 8a - 9½"; 24 cm
 8b - 7½"; 19 cm
 9 - 5½"; 14 cm
 9a - 4½"; 11½ cm
 9b - 3½"; 9 cm
 9c - 3"; 7½ cm
 9d - 2½"; 6 cm
 9e - 2"; 5 cm
 9f - 1½"; 38 mm

10 FISHPLATE

DOUBLE BRACKET
 11 - ½" x ½"; 12 x 12 mm
 11a - 1" x ½"; 25 x 12 mm

12 ANGLE BRACKETS
 12 - ½" x ½"; 12 x 12 mm
 12a - 1" x 1"; 25 x 25 mm
 12b - 1" x ½"; 25 x 12 mm

ANGLE BRACKET (OBTUSE)
 12c - ½" x ½"; 12 x 12 mm

AXLE RODS
 13 - 11½"; 29 cm
 13a - 8"; 20 cm
 14 - 6½"; 16½ cm
 14a - 5½"; 14 cm
 15 - 5"; 13 cm
 15a - 4½"; 11½ cm
 15b - 4"; 10 cm
 16 - 3½"; 9 cm
 16a - 2½"; 6 cm
 16b - 3"; 7½ cm
 17 - 2"; 5 cm
 18a - 1½"; 38 mm
 18b - 1"; 25 mm

SPOKED WHEEL
 19a - 3"; 75 mm

PULLEYS
 19b - 3"; 75 mm
 20a - 2"; 5 cm

PULLEY
 19c - 6"; 15 cm

CRANK HANDLE
 19h - 5"; 13 cm
 19s - 3½"; 9 cm

FLANGED WHEELS
 20 - 1½"; 28 mm
 20b - ¾"; 19 mm

PULLEY
 21 - 1½"; 38 mm

PULLEY
 22 - 1"; 25 mm

PULLEYS
 22a - 1"; 25 mm
 23 plastic - ½"; 12 mm
 23a - ½"; 12 mm
 23b metal - ½"; 12 mm

BUSH WHEEL
 24 - 1½"; 34 mm

WHEEL DISC
 24a - 1½"; 34 mm

BUSH WHEEL
 24b - 1½"; 34 mm

WHEEL DISC
 24c - 1½"; 34 mm

PINIONS
 25 - ¾" x ¼"; 19 x 6 mm
 25a - ¾" x ¼"; 19 x 12 mm
 25b - ¾" x ¼"; 19 x 19 mm
 26 - ¾" x ¼"; 12 x 6 mm
 26a - ¾" x ¼"; 12 x 12 mm
 26b - ¾" x ¼"; 12 x 19 mm
 26c - ¾" x ¼"; 11 x 6 mm

GEAR WHEELS
 27 - 1½"; 32 mm
 27a - 1½"; 38 mm
 27d - 1½"; 41 mm

GEAR WHEELS
 27b - 3½"; 9 cm
 27c - 2½"; 6 cm

CONTRATE WHEEL
 28 - 1½"; 38 mm
 29 - ¾"; 19 mm

BEVEL GEAR
 For use in pairs.
 30 - ¾"; 22 mm

BEVEL GEARS
 can only be used together.
 30a - ½"; 12 mm
 30c - 1½"; 38 mm

GEAR WHEEL
 31 - 1" x ½"
 25 mm x 6 mm

WORM
 32 - ½"; 12 mm

SPANNER
 34

BOX SPANNER
 34b

SPRING CLIP
 35

SCREWDRIVERS
 36
 36a
 36c

DRIFT
 36c

BOLT
 37b - ¾"; 5 mm

NUT
 37a

NUT AND BOLT
 37

WASHERS
 38 - ¾"; 10 mm
 38d - ¾"; 19 mm

HANK OF CORD
 40

PROPELLER BLADE
 41

TENSION SPRING
 43 - 2"; 5 cm

BENT STRIP STEPPED
 44


DOUBLE BENT STRIP
 45

DOUBLE ANGLE STRIPS
 46 - 2½" x 1"; 60 x 25 mm
 47 - 2½" x 1½"; 60 x 38 mm
 47a - 3" x 1½"; 75 x 38 mm
 48 - 1½" x 1"; 38 x 12 mm
 48a - 2½" x 1"; 60 x 12 mm
 48b - 3" x 1"; 90 x 12 mm
 48c - 4½" x 1"; 115 x 12 mm
 48d - 5½" x 1"; 140 x 12 mm


SLIDE PIECE
 50




51
FLANGED PLATES
 51 - 2½" × 1½"; 60 × 38 mm
 52 - 5½" × 2½"; 14 × 6 cm
 53 - 3½" × 2½"; 9 × 6 cm

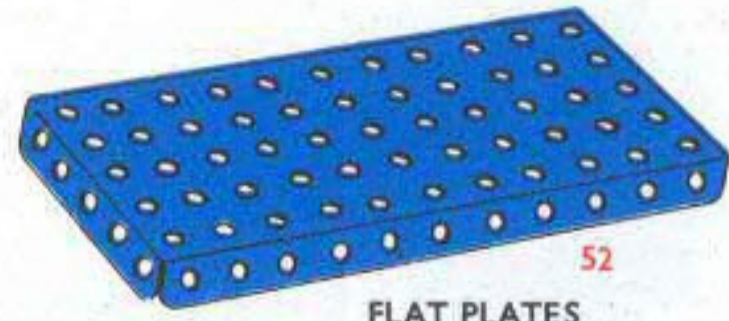

52
FLAT PLATES
 52a - 5½" × 3½"; 14 × 9 cm
 53a - 4½" × 2½"; 11½ × 6 cm

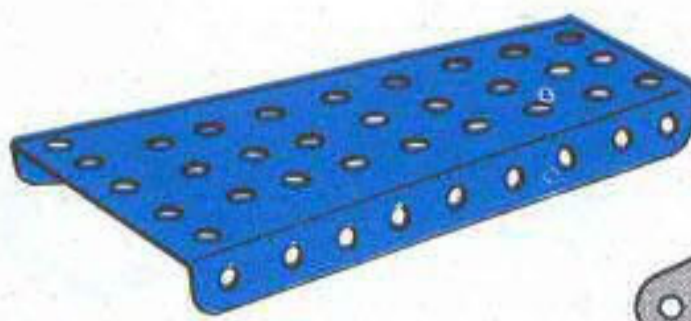

54 - 4½"; 115 mm
FLANGED SECTOR PLATE

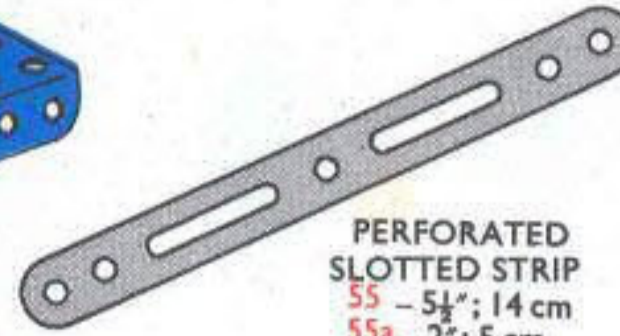

PERFORATED SLOTTED STRIP
 55 - 5½"; 14 cm
 55a - 2"; 5 cm



HOOK
 57b



HOOK
 57c



WIRE HOOK
 57d



58 **SPRING CORD** - 40"; 1 metre



COUPLING SCREW FOR 58
 58a



HOOK FOR 58
 58b



COLLAR WITH SCREW
 59



61
WINDMILL SAIL



62
CRANK
 62a **THREADED CRANK**



DOUBLE ARM CRANK
 62b



63
COUPLING



63c
THREADED COUPLING



63b
STRIP COUPLING



63d
SHORT COUPLING



64
THREADED BOSS



65
CENTRE FORK



69 - ½"; 4 mm
SET SCREW




69a - ½"; 4 mm
GRUB SCREWS




69b - ¾"; 5 mm




69c - ¾"; 3 mm

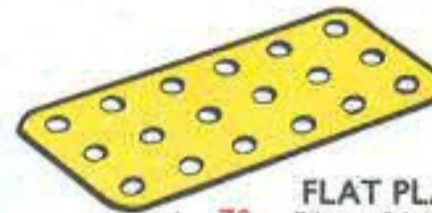


70 - 5½" × 2½"; 14 × 6 cm
72 - 2½" × 2½"; 6 × 6 cm
73 - 3" × 1½"; 75 × 38 mm
74 - 1½" × 1½"; 38 × 38 mm
FLAT PLATES

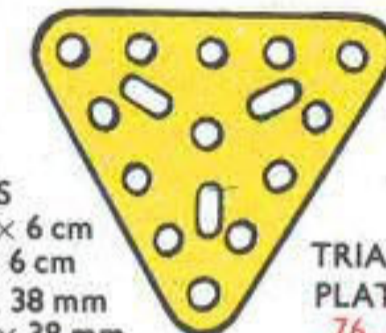


76
TRIANGULAR PLATES
 76 - 2½"; 6 cm
 77 - 1"; 25 mm

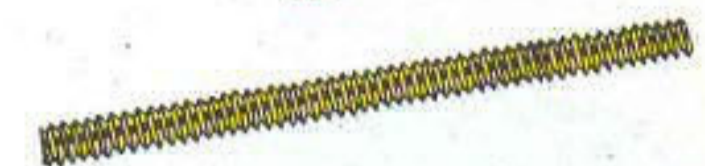

78 - 11½"; 29 cm
79 - 8"; 20 cm
79a - 6"; 15 cm
80 - 5"; 12½ cm
80a - 3½"; 9 cm
80b - 4½"; 11½ cm
80c - 3"; 7½ cm
81 - 2"; 5 cm
82 - 1"; 25 mm
SCREWED RODS

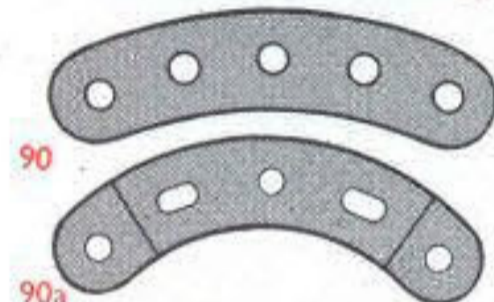


89 - 5½"; 14 cm
90 - 2½"; 6 cm
89a - 3"; 7½ cm
89b - 4"; 10 cm
90a - 2½"; 6 cm
CURVED STRIP
CURVED STRIP STEPPED



94 - 40";
SPROCKET CHAIN
 1 metre



95 - 2"; 5 cm
95a - 1½"; 38 mm
95b - 3"; 75 mm
96 - 1"; 25 mm
96a - ¾"; 19 mm
SPROCKET WHEELS

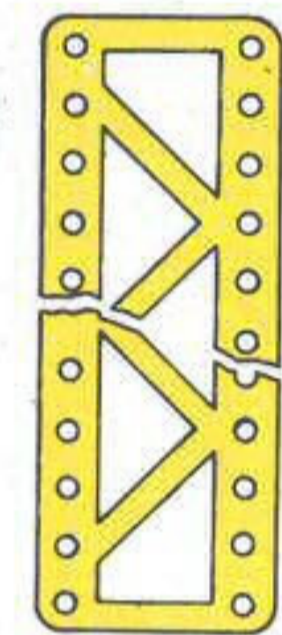


97 - 3½"; 9 cm
99 - 12½"; 32 cm
99a - 9½"; 24 cm
99b - 7½"; 19 cm
100 - 5½"; 14 cm
BRACED GIRDERS



101
HEAD FOR LOOM




102
SINGLE BENT STRIP

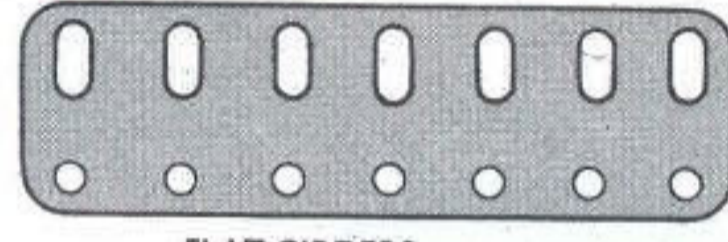


103 - 5½"; 14 cm
103a - 9½"; 24 cm
103b - 12½"; 32 cm
103c - 4½"; 11½ cm
103d - 3½"; 9 cm
103e - 3"; 7½ cm
103f - 2½"; 6 cm
103g - 2"; 5 cm
103h - 1½"; 38 mm
103k - 7½"; 19 cm
FLAT GIRDERS



106
WOOD ROLLER

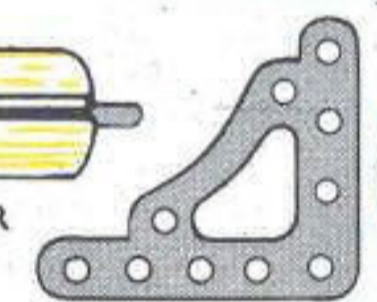


108
CORNER GUSSET

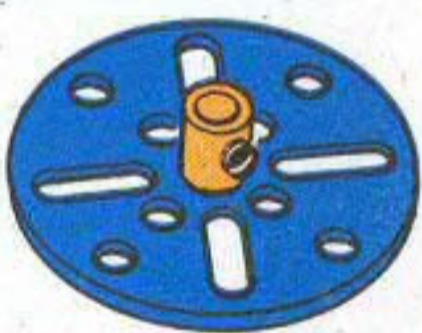


109 - 2½"; 6 cm
FACE PLATE



110 - 3½"; 9 cm
110a - 6½"; 16½ cm
RACK STRIPS



111 - ¾"; 19 mm
111a - ¾"; 12 mm
111c - ¾"; 9½ mm
111d - 1½"; 28½ mm
BOLTS

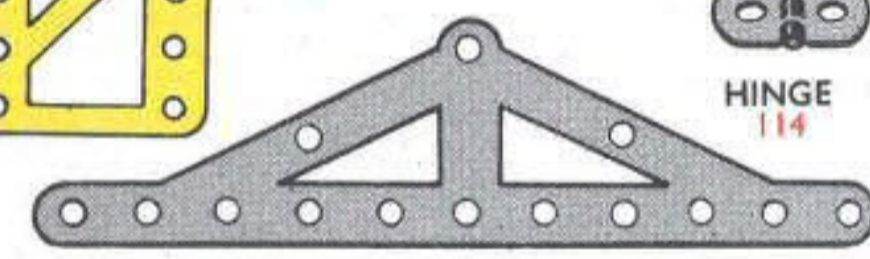


113
GIRDER FRAME



114
HINGE




115a - long. 1½"; 34 mm
115 - ½"; 15 mm
THREADED PINS



116a
FORK PIECE LARGE



116
FORK PIECE SMALL

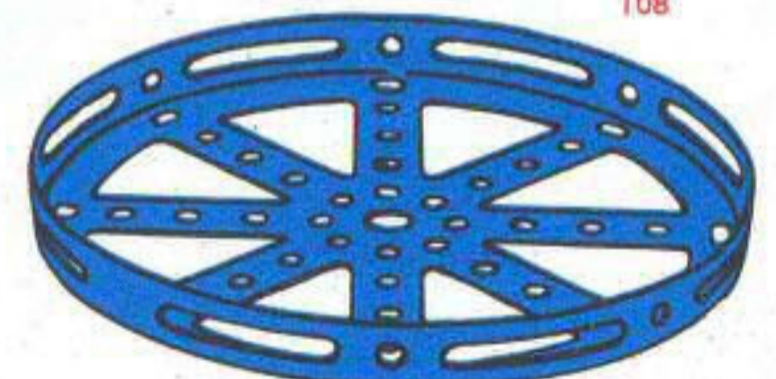


118 - 5½"; 14 cm
HUB DISC




120b - ¾"; 14 mm
COMPRESSION SPRING




123 - 1½" × 1" × ¾";
 32 × 25 × 19 mm
CONE PULLEY

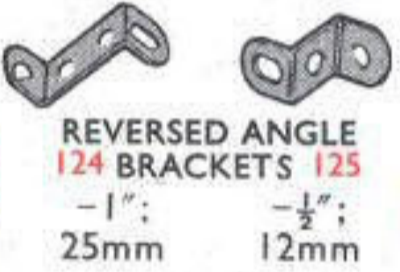

124
REVERSED ANGLE BRACKETS
 124 - 1"; 25 mm
 125 - ½"; 12 mm



126
TRUNNION



126a
FLAT TRUNNION



128
BELL CRANK




130 - ½" × ¾" × ½";
 6 × 9 × 12 mm
ECCENTRIC TRIPLE THROW




130a - ½"; 6 mm
ECCENTRIC SINGLE THROW



131
CAM




133 - 1½"; 38 mm
133a - 1"; 25 mm
CORNER BRACKETS



133a - 1"; 25 mm



134 - 1"; 25 mm
CRANK SHAFT

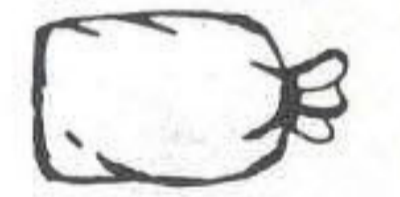

122
LOADED SACK



136
HANDRAIL SUPPORT COUPLING



136a



137
WHEEL FLANGE



138
SHIP'S FUNNEL



139 (right)
139a (left)
FLANGED BRACKET




140
UNIVERSAL COUPLING



142a - 2"; 5 cm
142b - 3"; 7½ cm
142c - 1"; 25 mm
142d - 1½"; 38 mm
MOTOR TYRES




143 - 5½"; 14 cm
CIRCULAR GIRDER



144
DOG CLUTCH



145 - 7½"; 19 cm
CIRCULAR STRIP

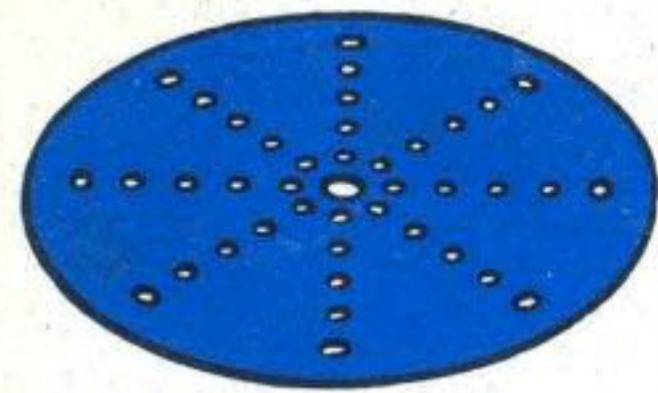

CIRCULAR PLATES
146a - 4"; 10 cm
146 - 6"; 15 cm



PAWL WITH PIVOT BOLT & NUTS
147



PAWL
147a



PIVOT BOLT
147b



147c PAWL WITHOUT BOSS



RATCHET WHEEL
148



153 PULLEY BLOCKS
153 TRIPLE
151 SINGLE




CORNER ANGLE BRACKET
154a - 1/2"; 12 mm (right)
154b - 1/2"; 12 mm (left)




RUBBER RING
155 - 1"; 25 mm




FAN
157 - 2"; 5 cm



CHANNEL BEARING
160 - 1 1/2" x 1" x 1/2";
38 x 25 x 12 mm



GIRDER BRACKET
161 - 2" x 1" x 1/2";
50 x 25 x 12 mm

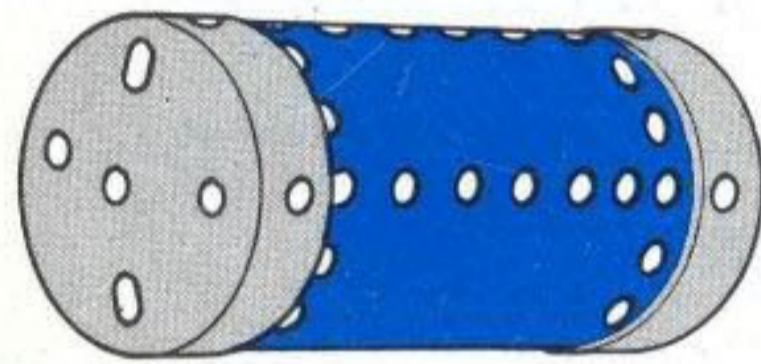

162 BOILER COMPLETE - 5" x 2 1/4"; 12 1/2 x 5 cm
162a BOILER END - 2 1/8" x 3/4"; 50 x 19 mm



SLEEVE PIECE
163 - 1 1/2" x 1 1/8";
38 x 17 mm



SWIVEL BEARING
165




END BEARING
166




LARGE TOOTHED QUADRANT PINION
167c



FLANGED RING
167b - 9 3/8"; 25 cm

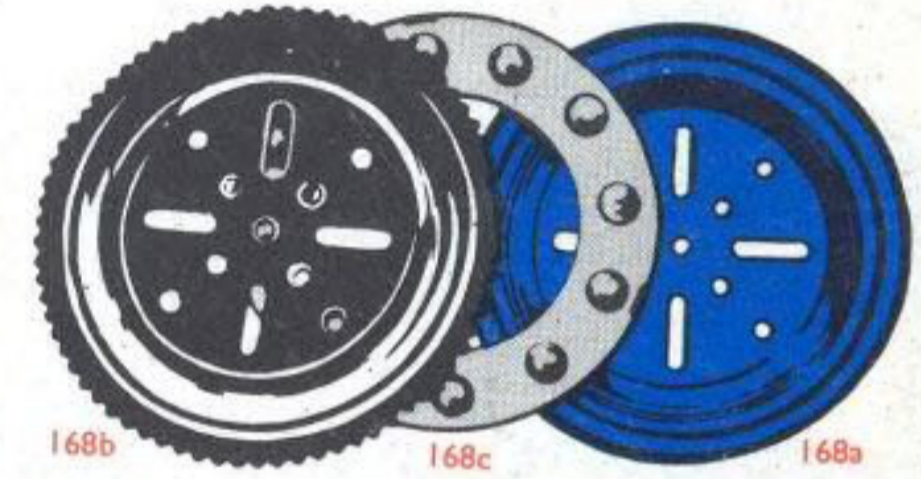

168 BALL THRUST BEARING COMPLETE 4"; 10 cm
168a AND 168b BALL THRUST RACES
168c BALL CAGE



CHIMNEY ADAPTOR
164 - 3/8" x 1/2";
16 x 12 mm



168d BALL
3/8"; 9 1/2 mm



173a ADAPTOR FOR SCREWED ROD



179 ROD SOCKET



GEAR RING
180 - 3 1/2"; 9 cm




STEERING WHEELS
185 - 1 1/2"; 4 1/2 cm
185a - 2 1/2"; 60 mm



DRIVING BANDS
light heavy
186 - 2 1/2"; 6 cm 186c - 10"; 25 cm
186a - 6"; 15 cm 186d - 15"; 37 1/2 cm
186b - 10"; 25 cm 186e - 20"; 50 cm



ROAD WHEELS
187 - 2 1/2"; 60 mm
187b - 4 1/2"; 108 mm

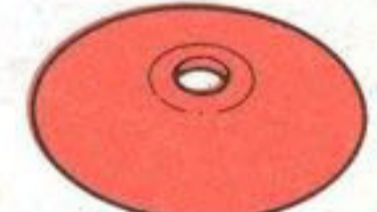


CONICAL DISC
187a - 1 3/4"; 47 mm




171 SOCKET COUPLING



176 ANCHORING SPRING

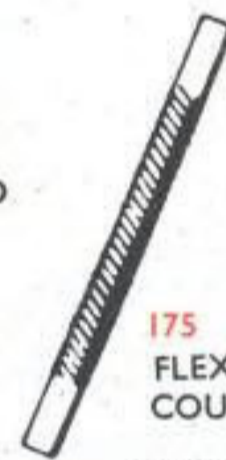

175 FLEXIBLE COUPLING UNIT

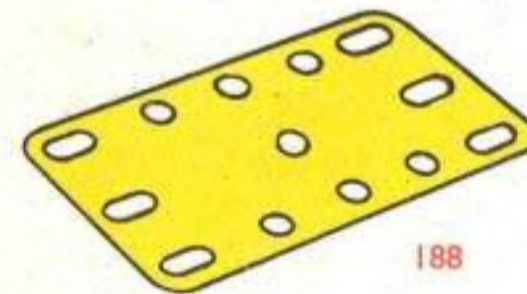


188

FLEXIBLE PLATES
188 - 2 1/2" x 1 1/2"; 60 x 38 mm
189 - 5 1/2" x 1 1/2"; 140 x 38 mm
190 - 2 1/2" x 2 1/2"; 6 x 6 cm
190a - 3 1/2" x 2 1/2"; 9 x 6 cm
191 - 4 1/2" x 2 1/2"; 11 1/2 x 6 cm
192 - 5 1/2" x 2 1/2"; 14 x 6 cm


TRANSPARENT PLATES
193 - 2 1/2" x 1 1/2"; 60 x 38 mm
193a - 2 1/2" x 2 1/2"; 60 x 60 mm

193b - 3 1/2" x 2 1/2"; 90 x 60 mm
193c - 4 1/2" x 2 1/2"; 115 x 60 mm
193d - 5 1/2" x 1 1/2"; 140 x 38 mm
193e - 5 1/2" x 2 1/2"; 140 x 60 mm


BLUE PLASTIC PLATES
194 - 2 1/2" x 1 1/2"; 60 x 38 mm
194a - 2 1/2" x 2 1/2"; 60 x 60 mm
194b - 3 1/2" x 2 1/2"; 90 x 60 mm
194c - 4 1/2" x 2 1/2"; 115 x 60 mm
194d - 5 1/2" x 1 1/2"; 140 x 38 mm
194e - 5 1/2" x 2 1/2"; 140 x 60 mm

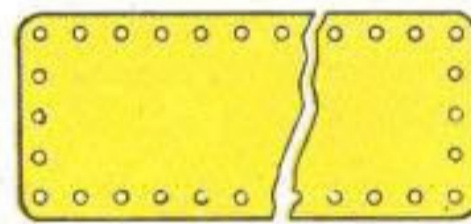


STRIP PLATES
195 - 7 1/2" x 2 1/2"; 19 x 6 cm
196 - 9 1/2" x 2 1/2"; 24 x 6 cm
197 - 12 1/2" x 2 1/2"; 32 x 6 cm

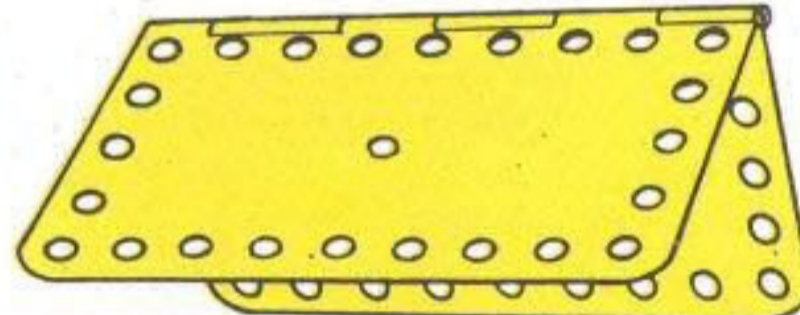


HINGED FLAT PLATE
198 - 4 1/2" x 2 1/2"; 11 1/2 x 6 cm

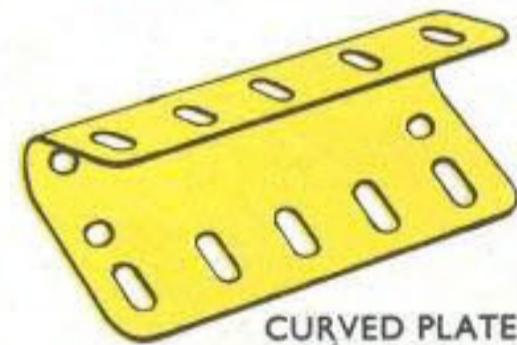


CURVED PLATE U SECTION
199 - 2 1/2" x 2 1/2" x 3/8";
60 x 60 x 7 mm

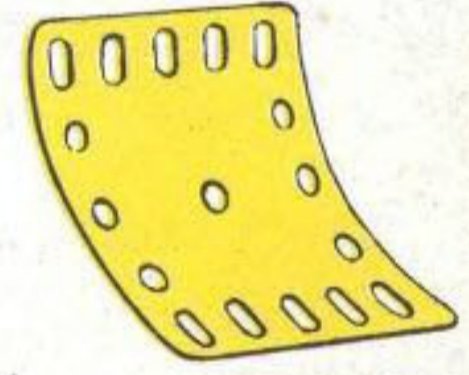

CURVED PLATE
200 - 2 1/2" x 2 1/2" x 1 1/8";
60 x 60 x 43 mm

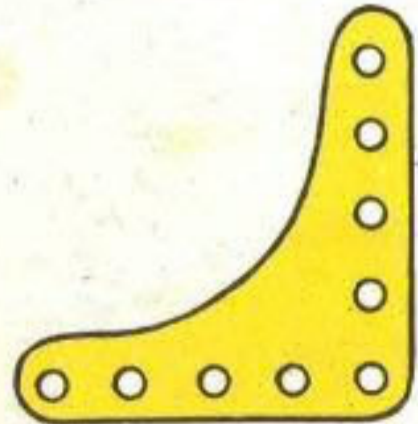

FLEXIBLE GUSSET PLATE
201 - 2 1/2" x 2 1/2";
60 x 60 mm

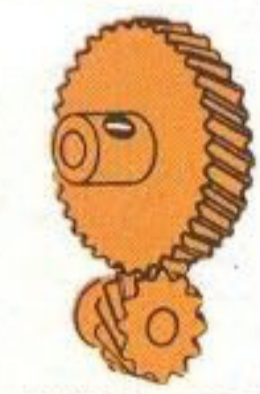

HELICAL GEARS
211a - 1/2"; 12 mm
211b - 1 1/2"; 38 mm
can only be used together.




212 ROD AND STRIP CONNECTOR




212a ROD AND STRIP CONNECTOR RIGHT ANGLE



213 ROD CONNECTORS

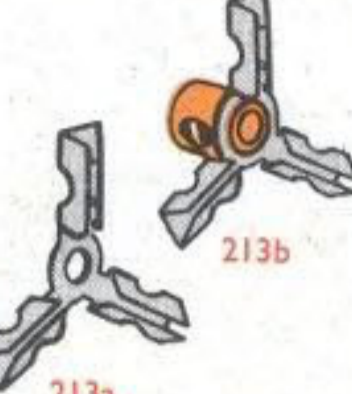


SEMI-CIRCULAR PLATE
214 - 2 1/2"; 6 cm

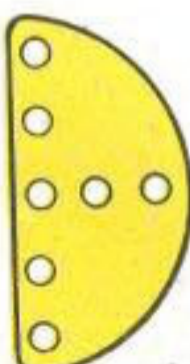

FORMED SLOTTED STRIP
215 - 3"; 7 1/2 cm



CYLINDER
216 - 2 1/2" x 1 1/2";
60 x 30 mm

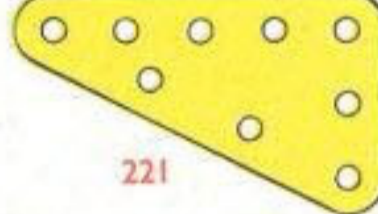

TRIANGULAR FLEXIBLE PLATES
221 - 2 1/2" x 1 1/2"; 60 x 38 mm
222 - 2 1/2" x 2"; 60 x 50 mm
223 - 2 1/2" x 2 1/2"; 60 x 60 mm
224 - 3 1/2" x 1 1/2"; 90 x 38 mm
225 - 3 1/2" x 2"; 90 x 50 mm
226 - 3 1/2" x 2 1/2"; 90 x 60 mm



223 KEY BOLT
231



ROD WITH KEYWAY
230 - 4"; 10 cm

NARROW STRIPS
235 - 2 1/2" x 1 1/8"; 60 mm x 9 mm
235a - 3" x 1 1/8"; 75 mm x 9 mm
235b - 3 1/2" x 1 1/8"; 90 mm x 9 mm
235d - 4 1/2" x 1 1/8"; 115 mm x 9 mm
235f - 5 1/2" x 1 1/8"; 140 mm x 9 mm